




篷房样册
CATALOGUE



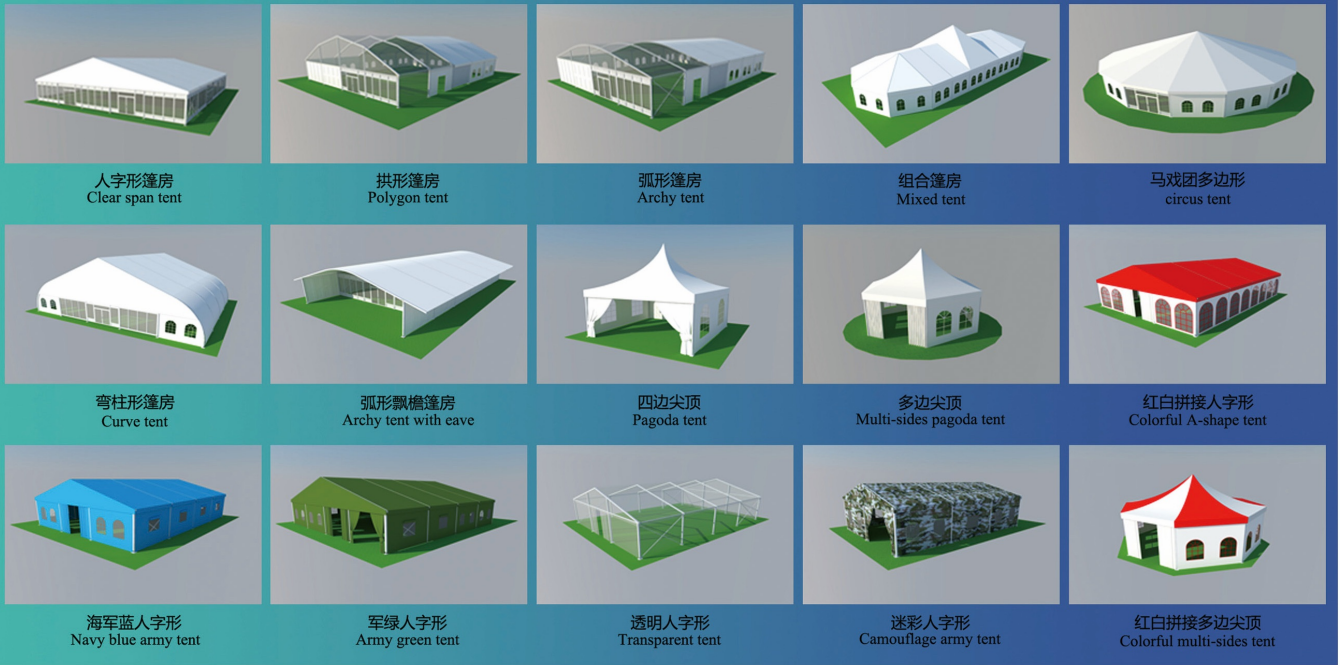

人字形篷房-大跨度
Clear span tent-Big span










人字形篷房-大跨度

产品特点 (Event Big Tent Features) :


- 全铝合金框架及钢铝合金框架, 抗风等级高
All aluminum alloy frame and steel frame, both available,
Windload 70-100km/h
- 拆装方便, 可循环使用5-15年
Easy assemble and dismantle, reusable for 5-15 years
- 篷布采用650克-850克双面PVC 涂层刀刮布, 防火阻燃、耐
高低温
Tarpaulin with 650g-850g double-coated PVC, fire resistant,
temperature resistance -30°~70°
- 内部无立柱设计, 空间100%利用
No bearing column, inner space 100% used
- 单元组合式结构, 可根据场地任意调节
Modular structure, width from 3m-50m, length no limit

框架主材 (Framework main profile)

			
150x108x3mm	203x112x4mm	259x120x5.5mm	300x120x5.5mm
			
166x88x3mm	100x80x3mm	50x50x2mm	80x80x2.5mm

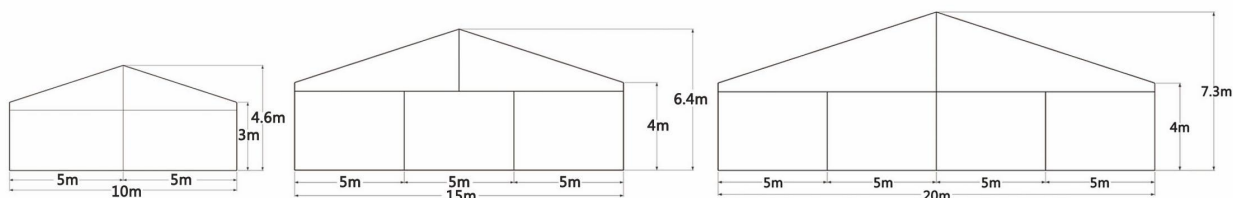


框架图 (Drawing)

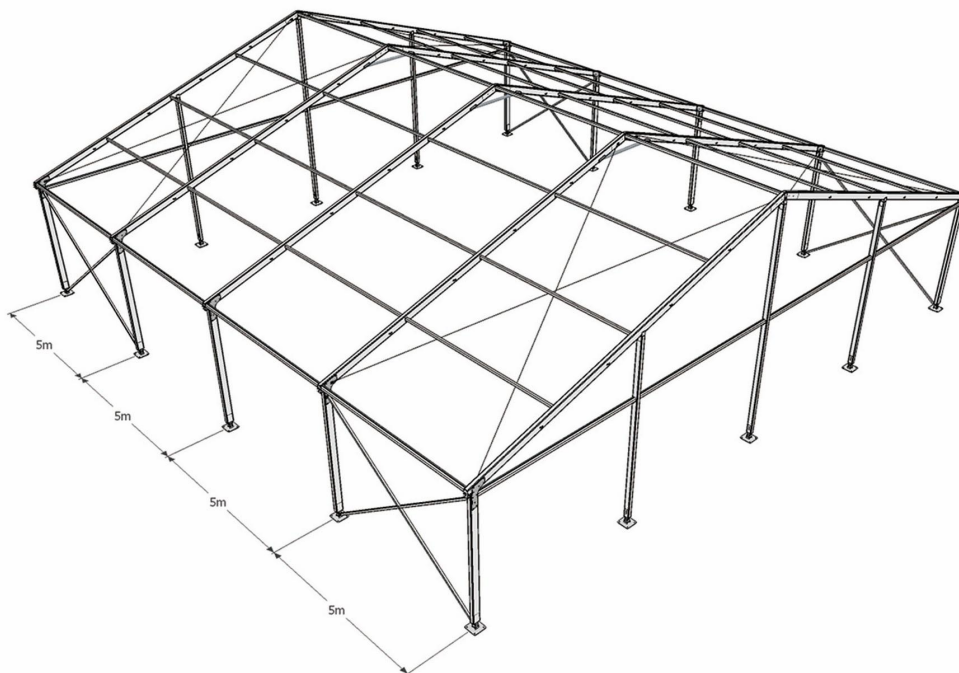

Clear span tent-Big span

项目 (Item)	参数 (Specification)
跨度 (Clear-span width)	10m~40m
边高 (Side height)	3m~5m
顶高 (Ridge height)	4.6m~11.5m
角度 (Roof pitch)	15°~18°~22°
间距 (Bay distance)	5m
最长部件 (The longest parts)	5.3m~11.1m
顶布固定类型 (Roof fixing)	压布杆+张紧器 (bar tensioning)
主材料 (Main profile)	166x88x3mm~300x120x5.5mm
风载 (Wind loading)	70~100km/h
立柱连接方式 (Eave connection)	加强板 (Galvanized reinforced steel panel)
布料 (Cover material)	PVC篷布650g、750g、850g、950g/m² double PVC –Coated polyester,650g/750g/850g/950g/m² , flame re- tardant, UV resistance, waterproof, comply to DIN 4102 B1, M2

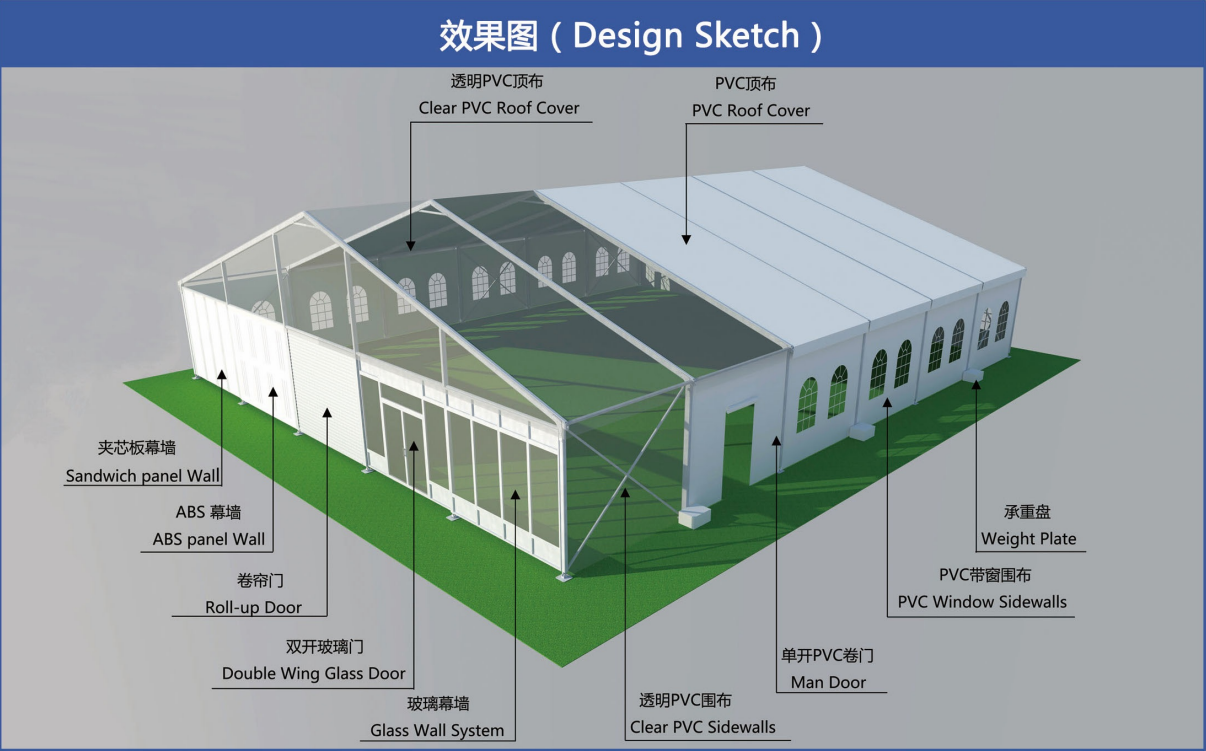





人字形篷房-小跨度
Clear span tent-Small span











产品特点 (Tent Features) :

- 全铝合金框架及钢铝合金框架, 抗风等级高
All aluminum alloy frame and steel frame, both available,
Windload 70-100km/h
- 拆装方便, 可循环使用5-15年
Easy assemble and dismantle, reusable for 5-15 years
- 篷布采用650克-850克双面PVC 涂层刀刮布, 防火阻燃、耐
高低温
Tarpaulin with 650g-850g double-coated PVC, fire resistant,
temperature resistance -30°~70°
- 内部无立柱设计, 空间100%利用
No bearing column, inner space 100% used
- 单元组合式结构, 可根据场地任意调节
Modular structure, width from 3m-50m, length no limit


人字形篷房-小跨度

框架主材 (Framework main profile)

 166x88x3mm	 68x122x3mm	 48x100x3mm	 48x84x3mm
 40x40x2mm	 50x50x2mm	 60x60x2mm	

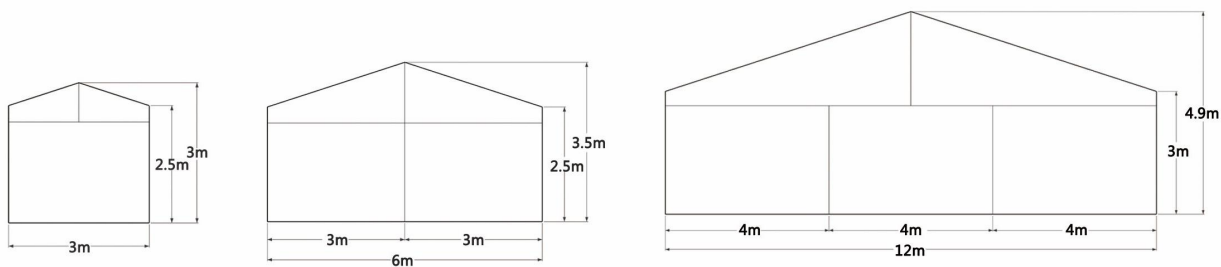


框架图 (Drawing)

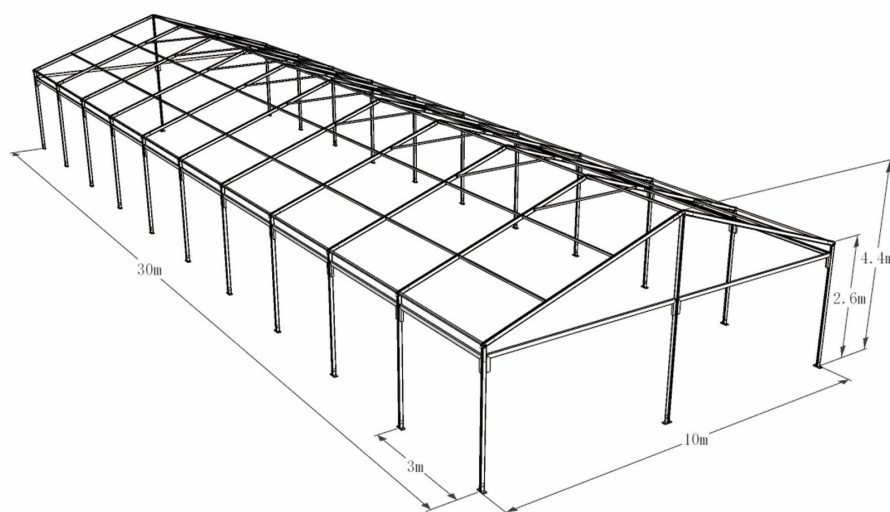

Rub Hall tent-Small span

项目 (Item)	参数 (Specification)
跨度 (Clear-span width)	10m
边高 (Side height)	2.6m
顶高 (Ridge height)	4.4m
角度 (Roof pitch)	19.8°
间距 (Bay distance)	3m
最长部件 (The longest parts)	5.4m
顶布固定类型 (Roof fixing)	压布杆+张紧器 (bar tensioning)
主材料 (Main profile)	68x122x3mm
风载 (Wind loading)	70~100km/h
立柱连接方式 (Eave connection)	插接式 (Insert)
布料 (Cover material)	PVC篷布900±50g/m² double PVC -Coated polyester,950±50g/m² , flame retardant, UV re- sistance, waterproof, comply to DIN 4102 B1, M2

效果图 (Design Sketch)

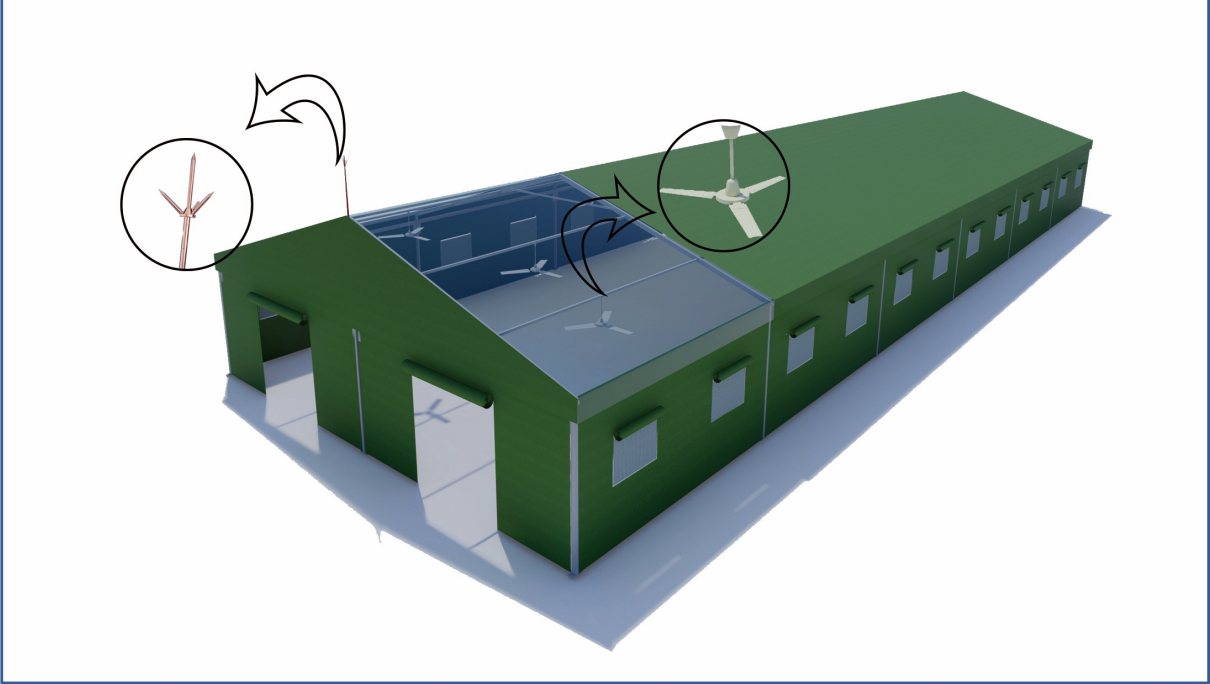





多拱形篷房
Polygon tent








多拱形篷房

产品特点 (Event Big Tent Features) :


- 全铝合金框架,造型恢宏
Polygon grand roof design, roof beam composed by multiple aluminum alloy
- 拆装方便,可循环使用5-15年
Easy assemble and dismantle , reusable for 5-15 years
- 篷布采用650克-850克双面PVC 涂层刀刮布,防火阻燃、耐高低温
Tarpaulin with 650g-850g double-coated PVC, fire resistant ,temperature resistance -30°~70°
- 内部无立柱设计,空间100%利用
No bearing column ,inner space 100% used
- 单元组合式结构,可根据场地任意调节
Modular structure, width from 3m-50m,length no limit

框架主材 (Framework main profile)

259x120x5.5mm	203x112x4mm	150x108x3mm	100x80x3mm

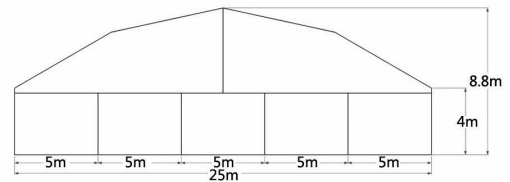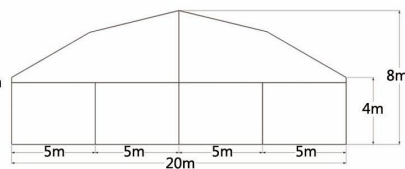


框架图 (Drawing)

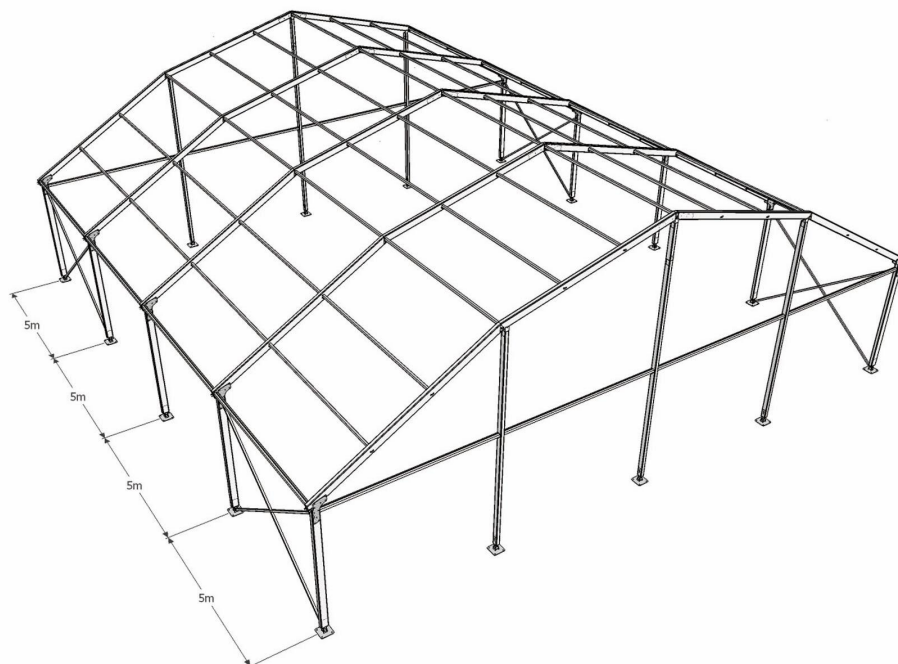


Polygon tent

项目 (Item)	参数 (Specification)
跨度 (Clear-span width)	15m~30m
边高 (Side height)	4m
顶高 (Ridge height)	7.2m~9.6m
角度 (Roof pitch)	18°
间距 (Bay distance)	5m
框架主材 (Framework Material)	Hard pressed extruded aluminum 6005/6061/T6 (15HW)
顶布固定类型 (Roof fixing)	压布杆+张紧器 (bar tensioning)
主材料 (Main profile)	150x108x3mm~259x120x5.5mm
风载 (Wind loading)	70~100km/h
立柱连接方式 (Eave connection)	加强板 (Galvanized reinforced steel panel)
布料 (Cover material)	PVC篷布650g、750g、850g、950g/m² double PVC -Coated polyester,650g/750g/850g/950g/m² , flame re- tardant, UV resistance, waterproof, comply to DIN 4102 B1, M2

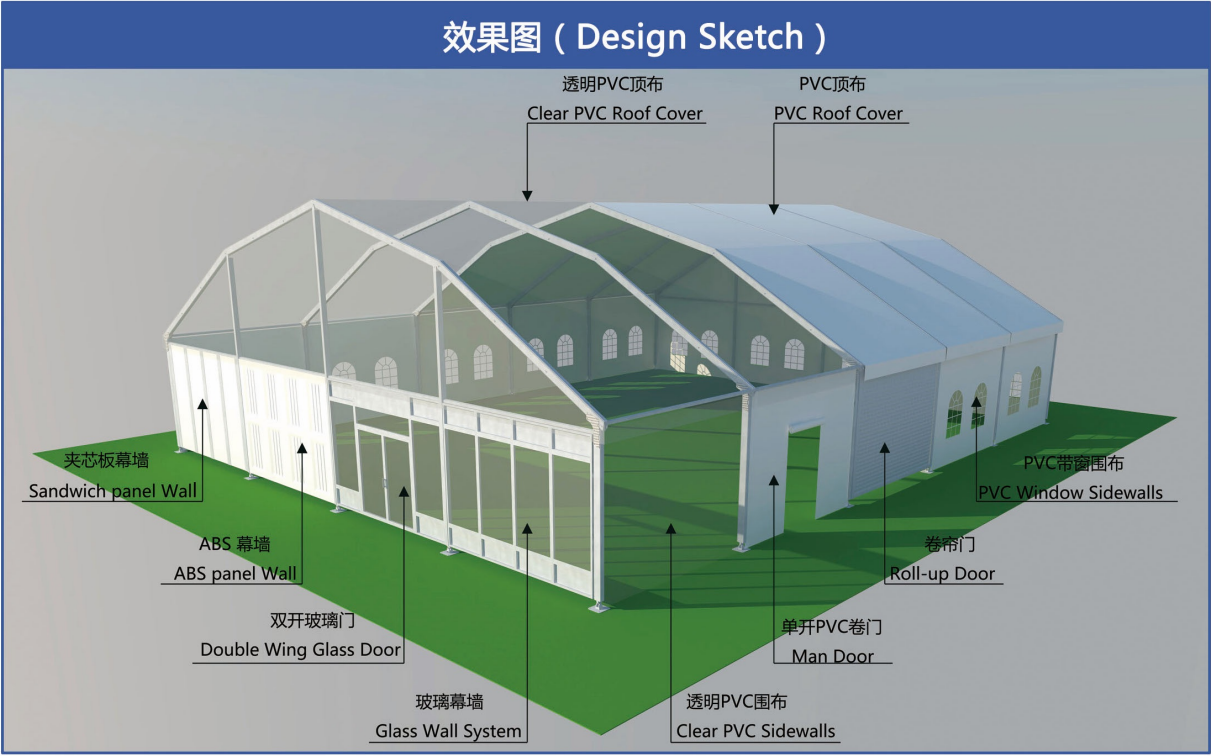



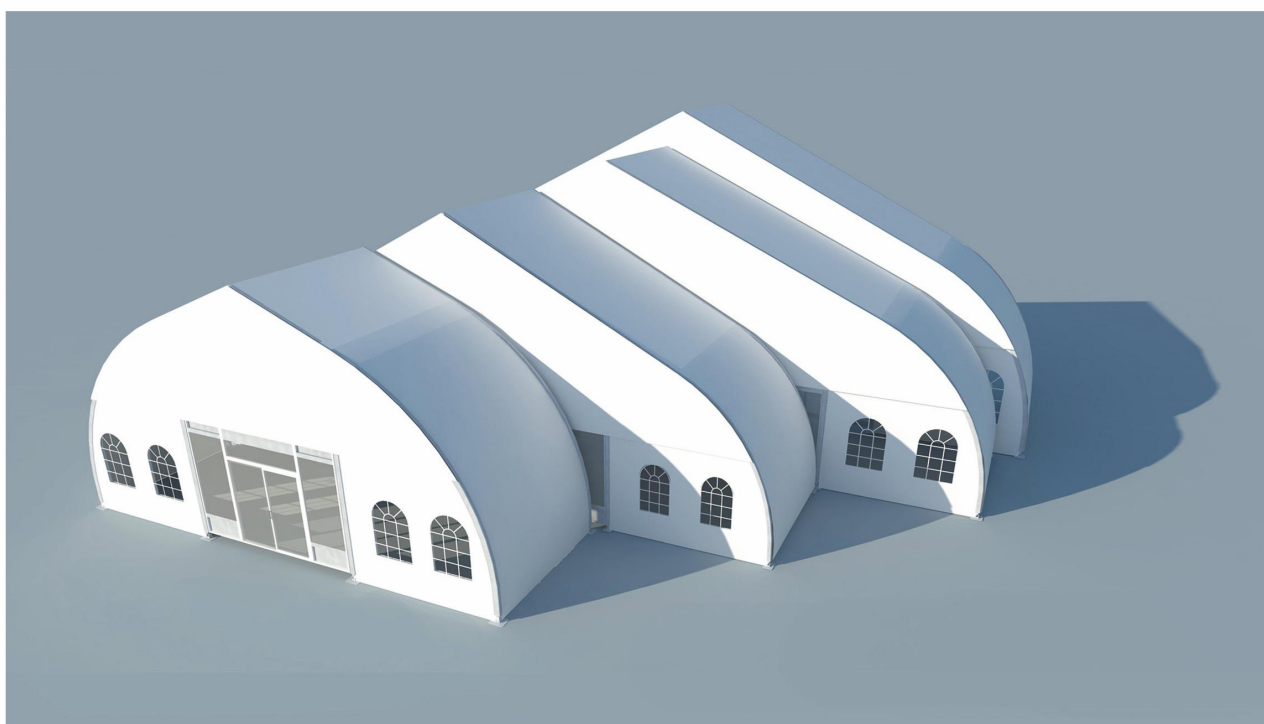

弯柱形篷房
Curve tent




弯柱篷房

产品特点 (Event Big Tent Features) :


- 心形外形设计，内部空间开阔
Heart shaped roof design, larger inner space
- 拆装方便，可循环使用5-15年
Easy assemble and dismantle, reusable for 5-15 years
- 篷布采用650克-850克双面PVC 涂层刀刮布，防火阻燃、耐
高低温
Tarpaulin with 650g-850g double-coated PVC, fire resis-
tant, temperature resistance -30°~70°
- 内部无立柱设计，空间100%利用
No bearing column, inner space 100% used

框架主材 (Framework main profile)

300x120x5.5mm	259x120x5.5mm	203x112x4mm	150x108x3mm

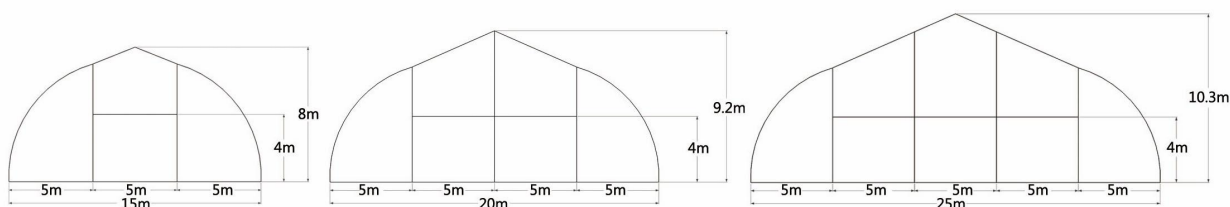


框架图 (Drawing)

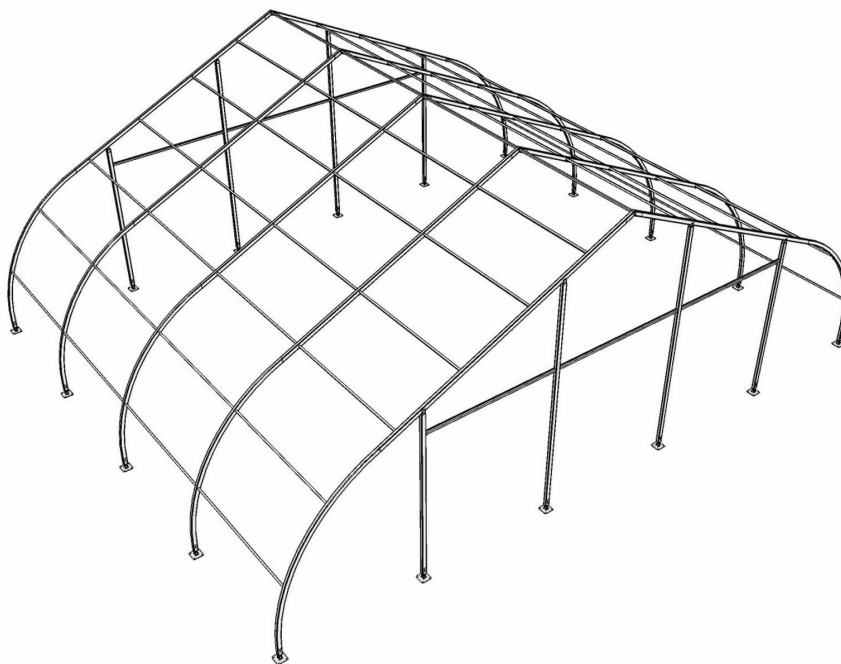


Curve tent

项目 (Item)	参数 (Specification)
跨度 (Clear-span width)	15m~40m
边高 (Side height)	4m
顶高 (Ridge height)	8m~11.5m
角度 (Roof pitch)	25°
间距 (Bay distance)	5m
框架主材 (Framework Material)	Hard pressed extruded aluminum 6005/6061/T6 (15HW)
顶布固定类型 (Roof fixing)	压布杆+张紧器 (bar tensioning)
主材料 (Main profile)	150x108x3mm~300x120x5.5mm
风载 (Wind loading)	70~100km/h
立柱连接方式 (Eave connection)	加强板 (Galvanized reinforced steel panel)
布料 (Cover material)	PVC篷布650g、750g、850g、950g/m² double PVC –Coated polyester,650g/750g/850g/950g/m² , flame re- tardant, UV resistance, waterproof, comply to DIN 4102 B1, M2

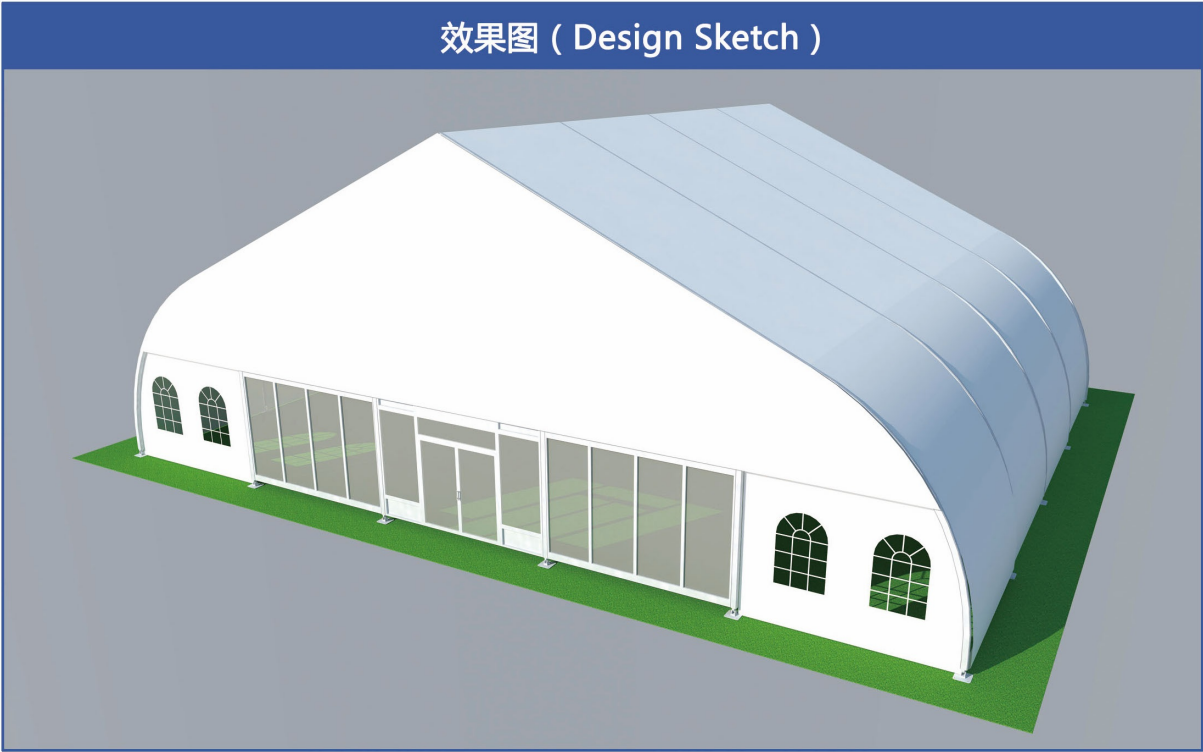



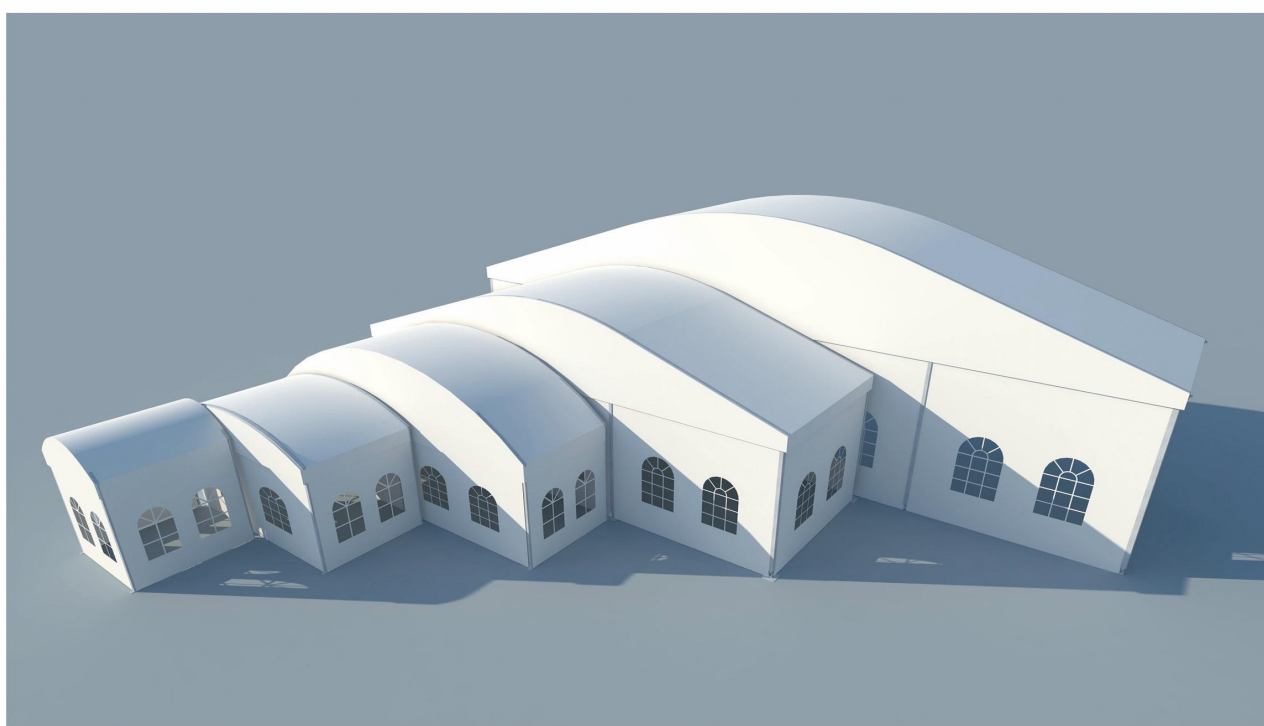

弧形篷房-大跨度
Archy tent-Big span




弧形篷房-大跨度

产品特点 (Event Big Tent Features) :


- 弧形屋顶设计，外观流畅、优雅
Archy fluent roof design, elegant outlook
- 拆装方便，可循环使用5-15年
Easy assemble and dismantle, reusable for 5-15 years
- 篷布采用650克-850克双面PVC 涂层刀刮布，防火阻燃、耐高低温
Tarpaulin with 650g-850g double-coated PVC, fire resistant, temperature resistance -30°~70°
- 内部无立柱设计，空间100%利用
No bearing column, inner space 100% used
- 单元组合式结构，可根据场地任意调节
Modular structure, width from 3m-50m, length no limit

框架主材 (Framework main profile)

259x120x5.5mm	203x112x4mm	150x108x3mm	100x80x3mm

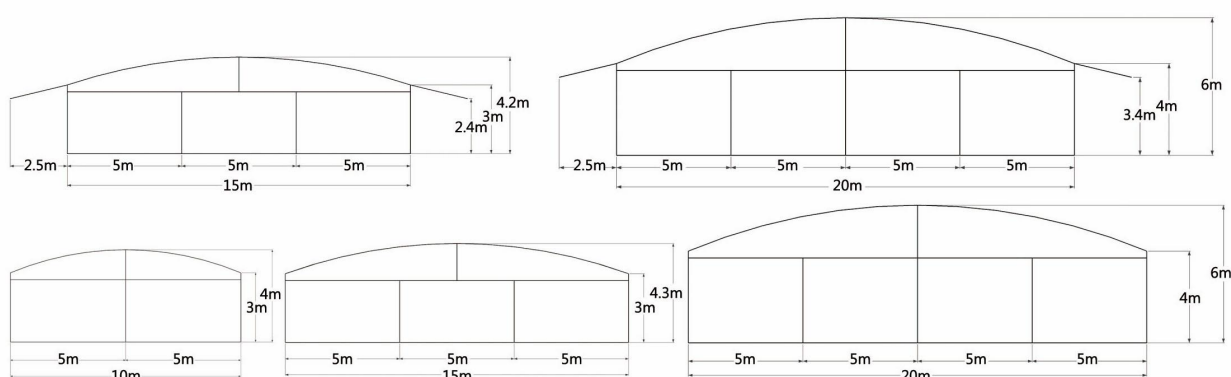


框架图 (Drawing)

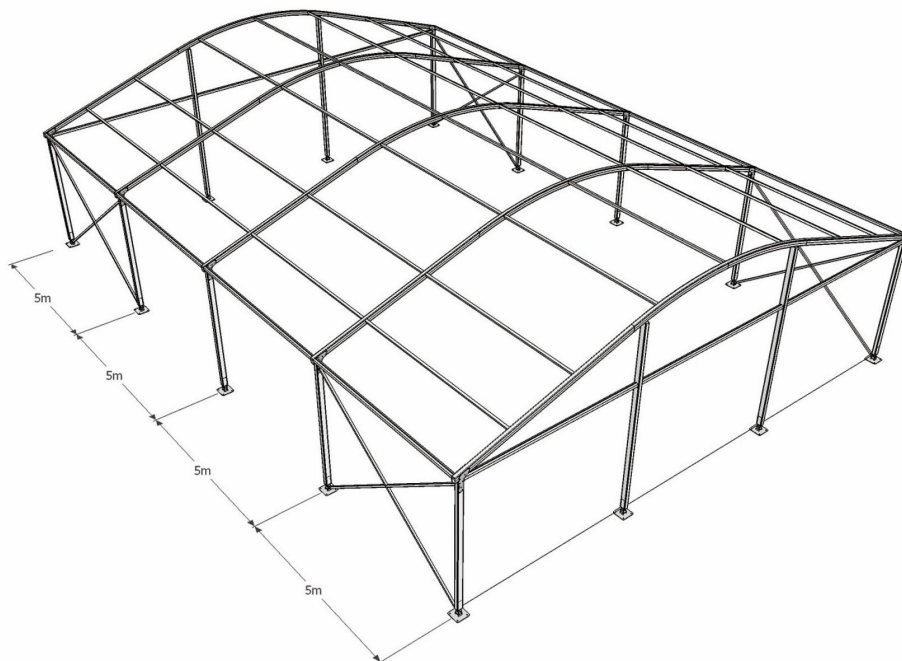


Archy tent-Big span

项目 (Item)	参数 (Specification)
跨度 (Clear-span width)	10m~25m
边高 (Side height)	3m~4m
顶高 (Ridge height)	4m~6.3m
角度 (Roof pitch)	18°
间距 (Bay distance)	5m
框架主材 (Framework Material)	Hard pressed extruded aluminum 6005/6061/T6 (15HW)
顶布固定类型 (Roof fixing)	压布杆+张紧器 (bar tensioning)
主材料 (Main profile)	150x108x3mm~259x120x5.5mm
风载 (Wind loading)	70~100km/h
立柱连接方式 (Eave connection)	加强板 (Galvanized reinforced steel panel)
布料 (Cover material)	PVC篷布650g、750g、850g、950g/m² double PVC –Coated polyester,650g/750g/850g/950g/m² , flame re- tardant, UV resistance, waterproof, comply to DIN 4102 B1, M2

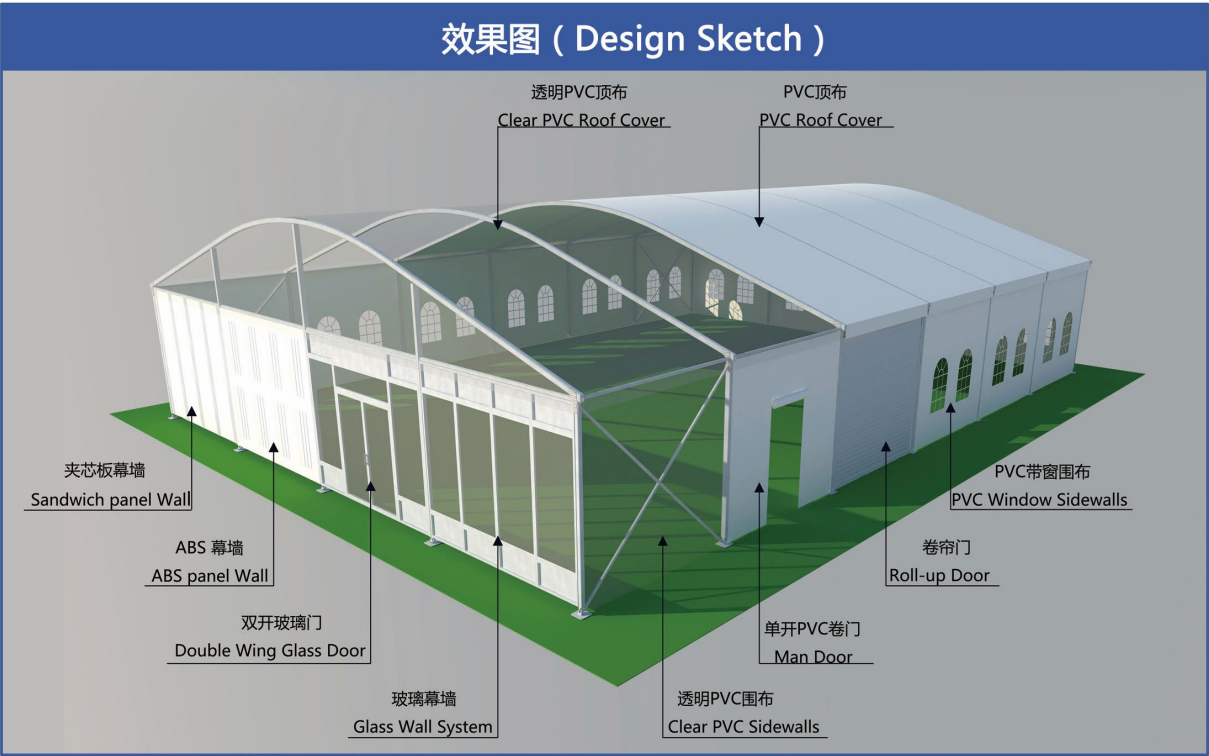



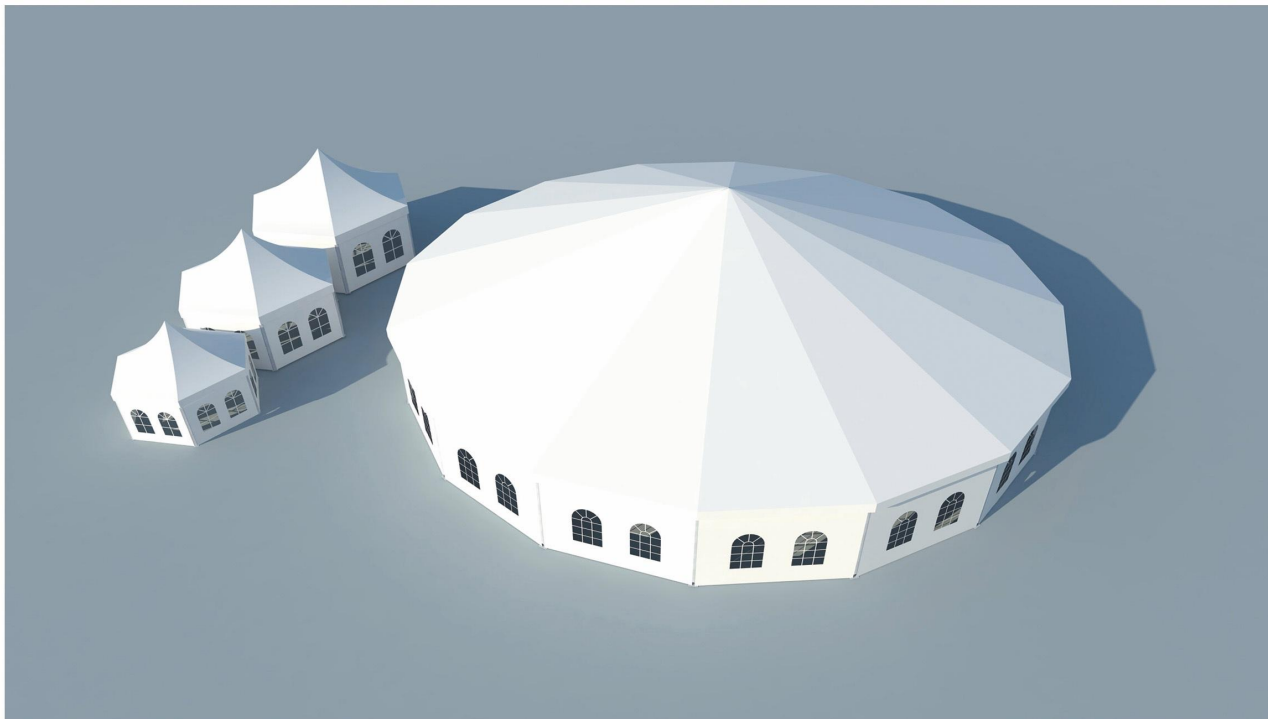

多边形篷房 Multi-side tent







产品特点 (Event Big Tent Features) :


- 圆形屋顶设计, 外观圆润、优雅
Multi-side circular roof design ,elegant outlook
- 易于装饰, 创造活动氛围
Suitable for decoration with cheerful atmosphere
- 拆装方便, 可循环使用5-15年
Easy assemble and dismantle , reusable for 5-15 years
- 篷布采用650克-850克双面PVC 涂层刀刮布, 防火阻燃、耐高低温
Tarpaulin with 650g-850g double-coated PVC, fire resistant ,temperature resistance -30°~70°
- 内部无立柱设计, 空间100%利用
No bearing column ,inner space 100% used

框架主材 (Framework main profile)

259x120x5.5mm	203x112x4mm	150x108x3mm	48x100x3mm

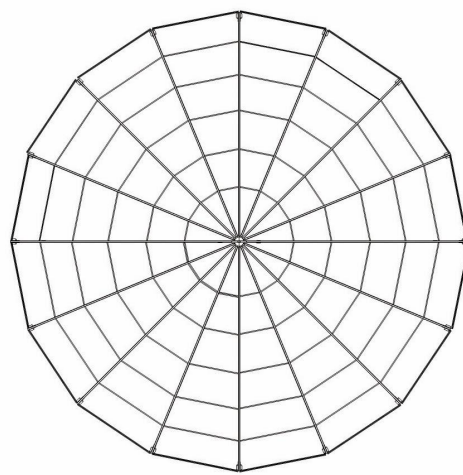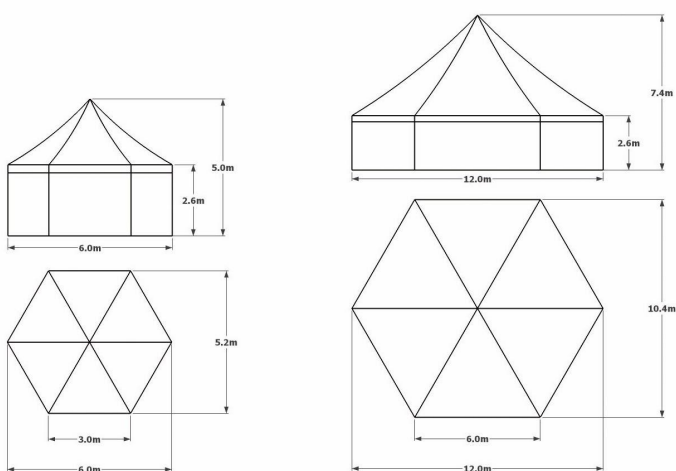



框架图 (Drawing)

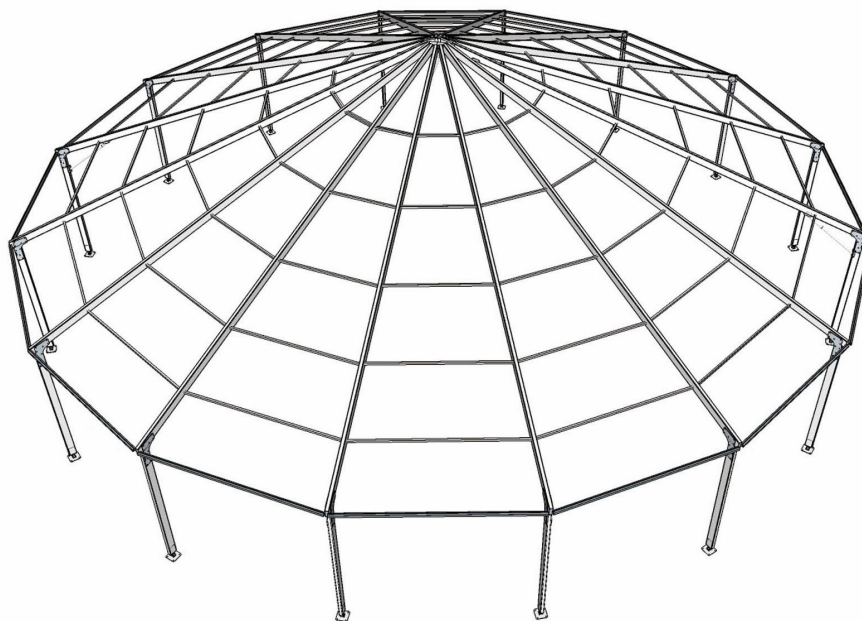

Multi-side tent

项目 (Item)	参数 (Specification)
跨度 (Clear-span width)	6m~30m
边高 (Side height)	2.6m~5m
顶高 (Ridge height)	5m~11m
角度 (Roof pitch)	15°~18°
间距 (Bay distance)	3m~6m
框架主材 (Framework Material)	Hard pressed extruded aluminum 6005/6061/T6 (15HW)
顶布固定类型 (Roof fixing)	压布杆+张紧器 (bar tensioning)
主材料 (Main profile)	48x84x3mm~300x120x5.5mm
风载 (Wind loading)	70~100km/h
立柱连接方式 (Eave connection)	加强板 (Galvanized reinforced steel panel) /插接式 (Insert)
布料 (Cover material)	PVC篷布650g、750g、850g、950g/m² double PVC –Coated polyester,650g/750g/850g/950g/m² , flame re- tardant, UV resistance, waterproof, comply to DIN 4102 B1, M2

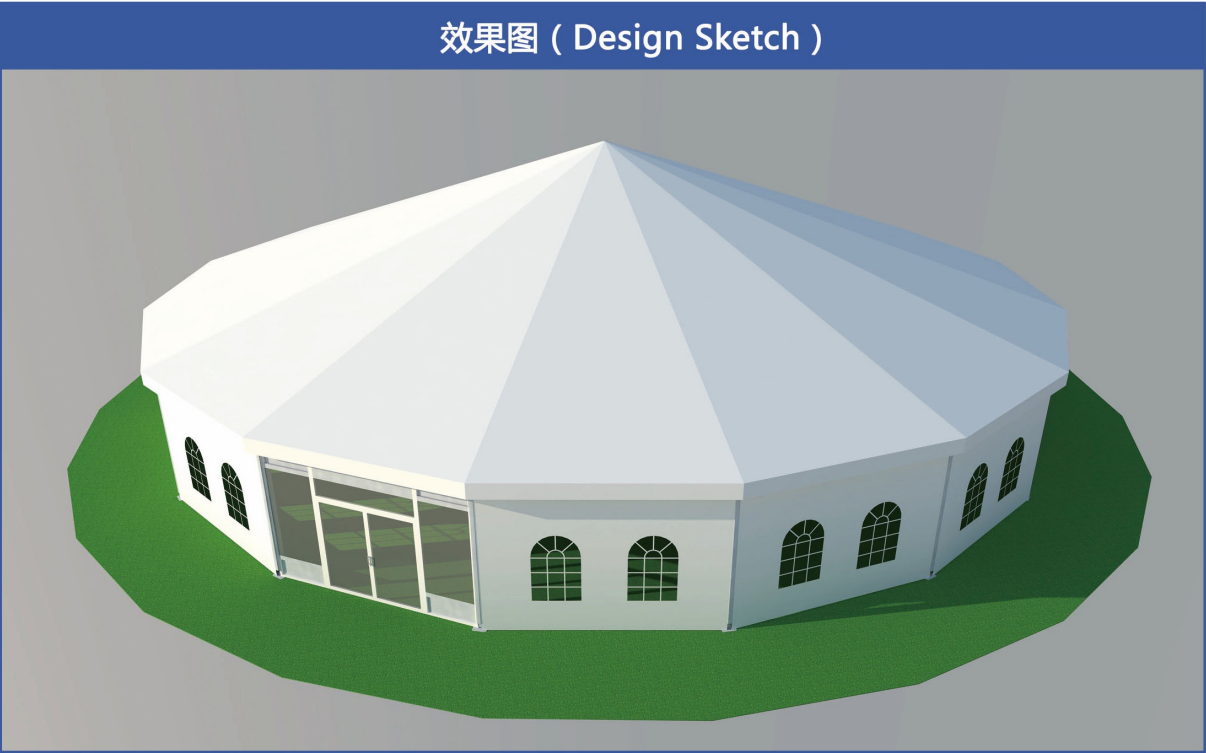

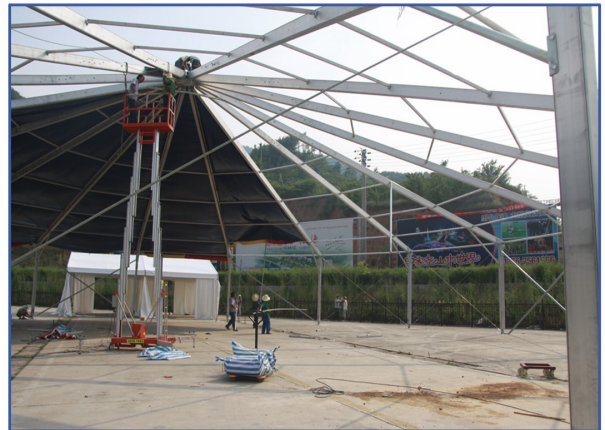



尖顶篷房
Pagoda tent







尖顶篷房

产品特点 (Event Big Tent Features) :

- 造型独立、结实耐用，适用于不规则场地
Independent durable structure design, applies to irregular sites
- 可组合使用，打造活动氛围
Composite use getting event cheerful atmosphere
- 全铝合金框架及钢铝合金框架
All aluminum alloy frame and steel frame, both available
- 篷布采用650克-850克双面PVC 涂层刀刮布，防火阻燃、耐高低温
Tarpaulin with 650g-850g double-coated PVC, fire resistant, temperature resistance -30°~70°

框架主材 (Framework main profile)

 48x100x3mm	 48x84x3mm	 65x65x3mm
---	---	--

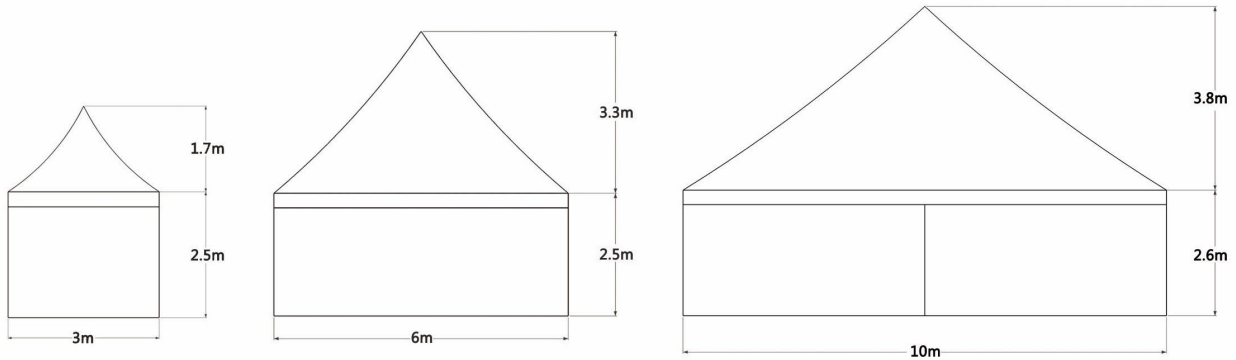


框架图 (Drawing)




Pagoda tent

项目 (Item)	参数 (Specification)
跨度 (Clear-span width)	3m~10m
边高 (Side height)	2.5m~2.6m
顶高 (Ridge height)	4.2m~6.4m
角度 (Roof pitch)	15°
间距 (Bay distance)	3~10m
框架主材 (Framework Material)	Hard pressed extruded aluminum 6005/6061/T6 (15HW)
顶布固定类型 (Roof fixing)	压布杆+张紧器 (bar tensioning)
主材料 (Main profile)	48x84x3mm~65x65x3mm
风载 (Wind loading)	70~100km/h
立柱连接方式 (Eave connection)	插接式 (Insert)
布料 (Cover material)	PVC篷布650g、750g、850g、950g/m² double PVC –Coated polyester,650g/750g/850g/950g/m² , flame re- tardant, UV resistance, waterproof, comply to DIN 4102 B1, M2

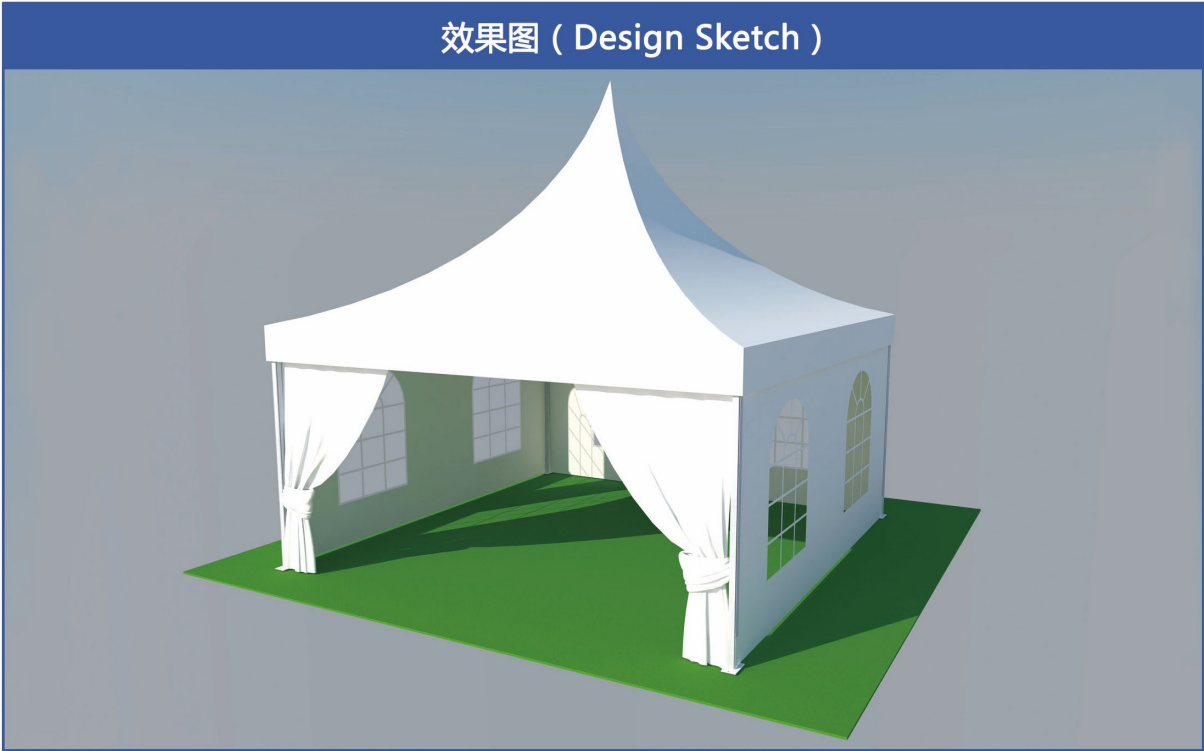



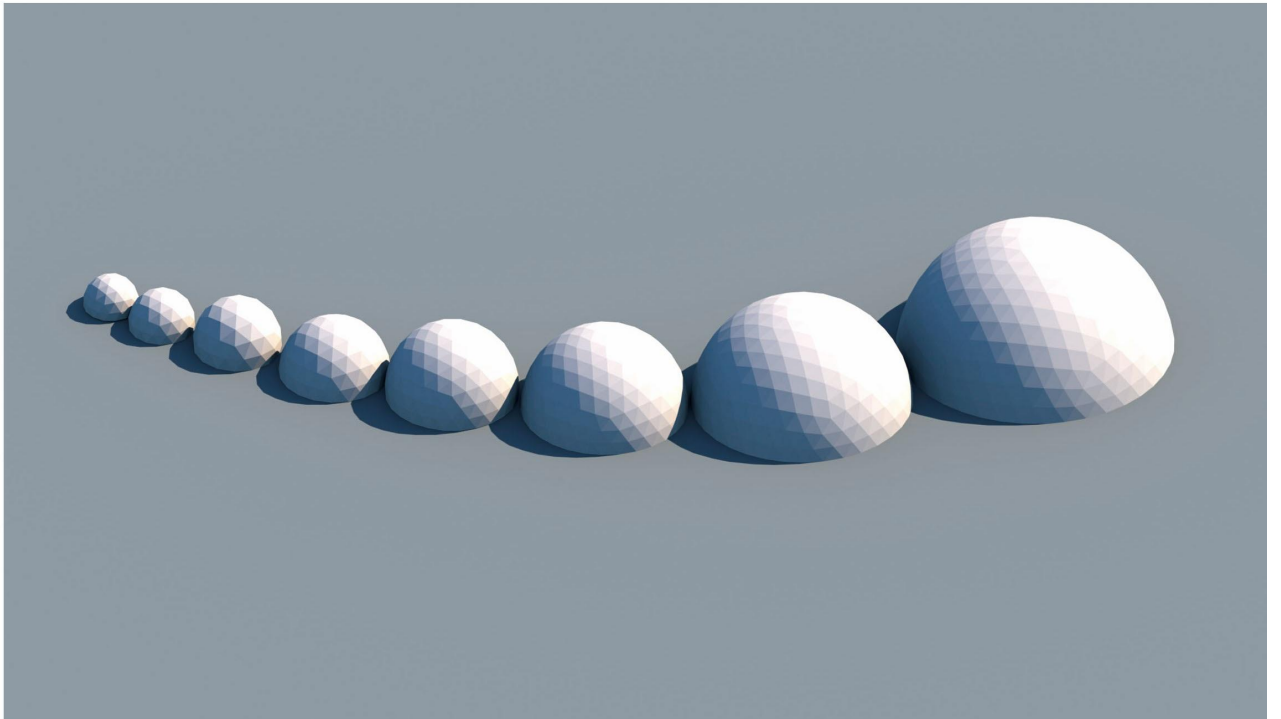

球型帐篷

Dome tent










球型篷房

产品特点 (Event Big Tent Features) :


- 球型设计, 内部空间开阔
Spheroidal roof design, larger inner space
- 拆装方便, 可循环使用5-15年
Easy assemble and dismantle, reusable for 5-15 years
- 篷布采用650克-850克双面PVC 涂层刀刮布, 防火阻燃、耐
高低温
Tarpaulin with 650g-850g double-coated PVC, fire resis-
tant, temperature resistance -30°~70°
- 内部无立柱设计, 空间100%利用
No bearing column, inner spac

框架主材 (Framework main profile)

			
42x2mm	38x2mm	32x2mm	25x1.5mm

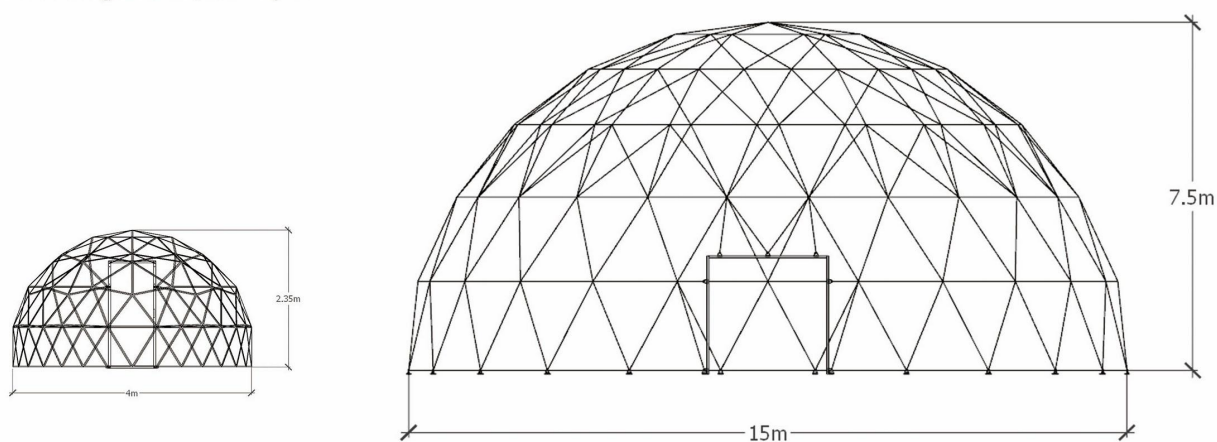


框架图 (Drawing)

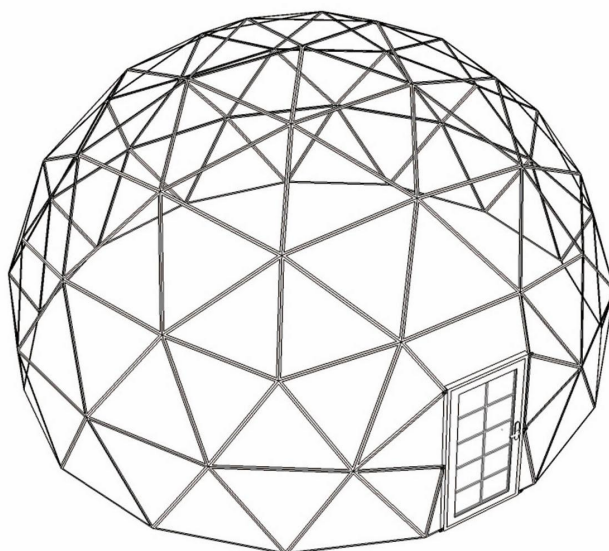

Dome tent

项目 (Item)	参数 (Specification)
直径 (Diameter)	4m~30m
边高 (Side height)	
顶高 (Ridge height)	2.35m~15m
角度 (Roof pitch)	
间距 (Bay distance)	
框架主材 (Framework Material)	Q235表面喷塑 (spraying plastics)
顶布固定类型 (Roof fixing)	压布杆 (bar tensioning)
主材料 (Main profile)	25x1.5mm~42x2mm
风载 (Wind loading)	100~130km/h
立柱连接方式 (Eave connection)	螺丝拼接
布料 (Cover material)	PVC篷布650g、750g、850g、950g/m² double PVC –Coated polyester,650g/750g/850g/950g/m² , flame re- tardant, UV resistance, waterproof, comply to DIN 4102 B1, M2

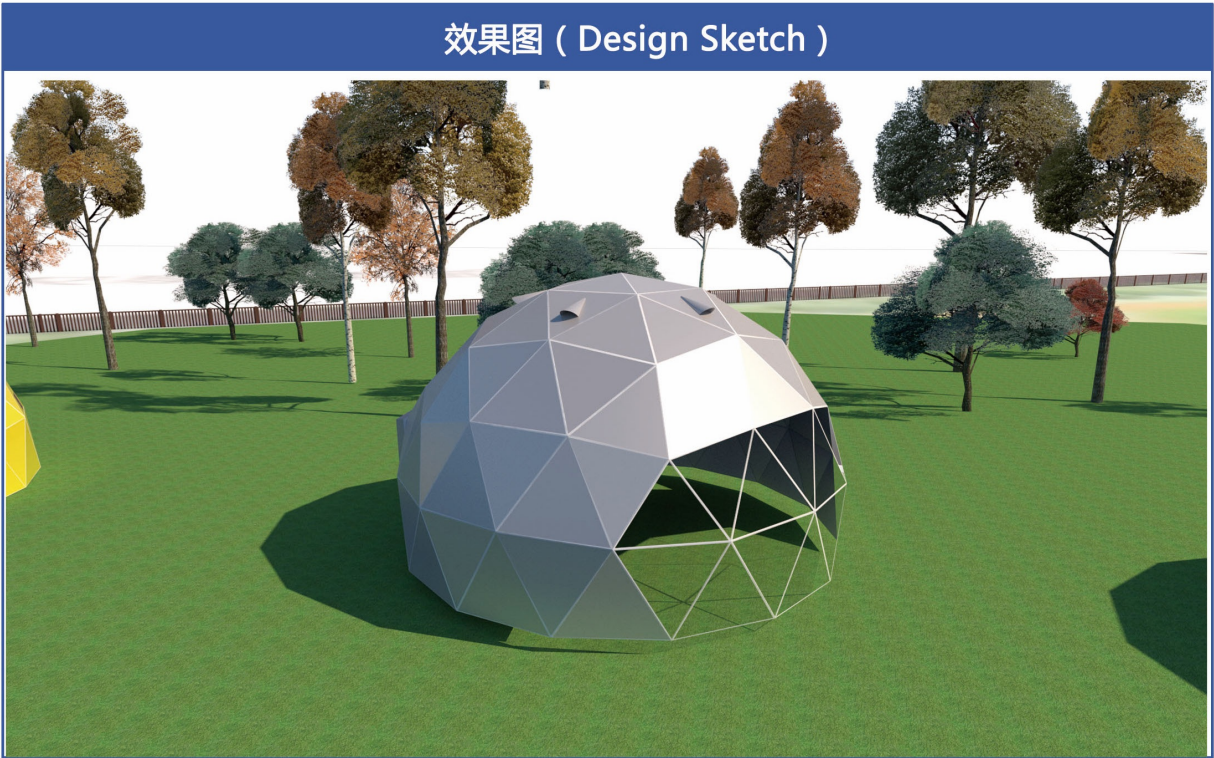





篷房配件 Tent accessories

家具配件 (Furniture)



装饰配件 (Decorating accessories series)

