

CNB POWER

Quality Maker

CNBPOWER® SERIES 5

480-500W Mono FULL BLACK

132 Half-Cell Layout
M10/182mm Cell



Full Black Appearance
for Aesthetic Effect



Gallium-doped Technology



Half Cut Cell Technology




Anti-PID
Low LID
Performance




Less Hot Spot
Shading Effects



Ideal for Residential
Rooftop Application

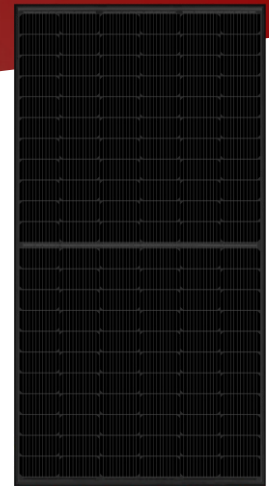

Linear performance Warranty

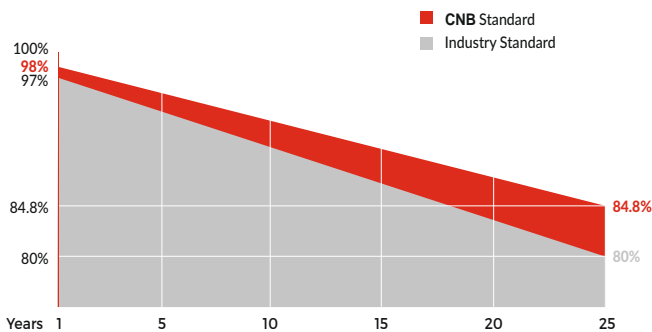


Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard quality



MECHANICAL CHARACTERISTICS

Solar Cells	Mono
No. of Cells	132 (6x22)
Dimensions	2094 x 1134 x 35mm
Weight	25.5kg
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	300mm (+) / 300mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

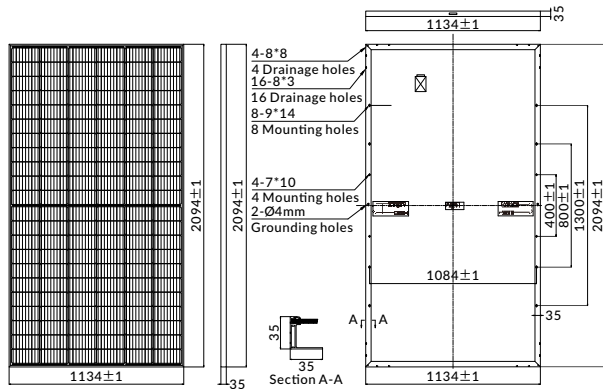

ELECTRICAL PARAMETERS


POWER CLASS	LNVT-480M		LNVT-485M		LNVT-490M		LNVT-495M		LNVT-500M	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	480W	361W	485W	365W	490W	369W	495W	373W	500W	377W
Open Circuit Voltage (Voc)	46.01V	43.27V	46.18V	43.53V	46.34V	43.78V	46.51V	44.03V	46.67V	44.28V
Short Circuit Current (Isc)	13.53A	10.85A	13.60A	10.89A	13.67A	10.93A	13.74A	10.97A	13.81A	11.01A
Voltage at Maximum power (Vmpp)	37.97V	35.29V	38.16V	35.54V	38.34V	35.79V	38.52V	36.04V	38.70V	36.28V
Current Maximum Power (Impp)	12.64A	10.23A	12.71A	10.27A	12.78A	10.31A	12.85A	10.35A	12.92A	10.39A
MODULE EFFICIENCY (%)	20.21%		20.42%		20.64%		20.85%		21.06%	

STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G


PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	31	31
Pallets per container	5	22
Pieces per container	155	682

I-V CURVE

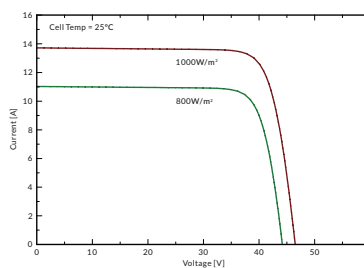

LNVT-500M/I-V

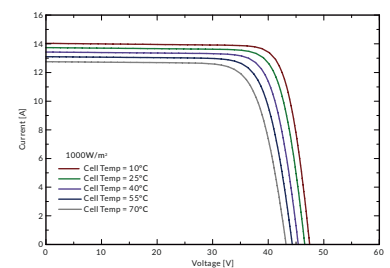

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	25A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.36%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	+0.05%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. CNB SOLAR reserves the right to modify the information any time without prior notice.